



पुण्यश्लोक अहिल्यादेवी होळकर
सोलापूर विद्यापीठ
NAAC Accredited-2015
'B' Grade (CGPA 2.62)

पुण्यश्लोक अहिल्यादेवी होळकर सोलापूर विद्यापीठ, सोलापूर
Punyashlok Ahilyadevi Holkar Solapur University, Solapur

केगाव, सोलापूर-४१३२५५ महाराष्ट्र (भारत)

दुरध्वनी क्र.०२१७-२७४४७७१-७३ (११ लाईन्स) फॅक्स-०२१७-२३५१३००

संकेतस्थळ <http://su.digitaluniversity.ac.in> ई-मेल fao@sus.ac.in

केंद्रीय खरेदी विभाग

जा.क्र.पुअहोसोविसो/विवले/केंखवि/२०१९/४८७

दिनांक : 7 AUG 2019

On University Website

प्रति,

विषय :- विद्यापीठ परिसरातील ४८२ एकर मध्ये अॅग्रोटयुरीझम करिता लोखंडी टॉवर तयार करून बसविणेबाबत कामासाठी दरपत्रके मागणी...

महोदय / महोदया,


उपरोक्त विषयास अनुसरून आपणास कळविण्यात येते की, प्रस्तुत विद्यापीठ परिसरातील ४८२ एकर मध्ये अॅग्रोटयुरीझम करिता लोखंडी टॉवर तयार करून बसविणेबाबत कामासाठी दरपत्रके मागणी बाबतच्या कामासाठी दरपत्रके मागणी आपले अपेक्षित दर GST सह दरपत्रक भरून मा.वित्त व लेखा अधिकारी, पुण्यश्लोक अहिल्यादेवी होळकर सोलापूर विद्यापीठ, सोलापूर यांच्या नावे पाकिटावर दरपत्रक अॅग्रोटयुरीझम करिता लोखंडी टॉवर असे स्पष्ट नमुद करून दि. १९/०८/२०१९ पर्यंत पाठवावे.

तरी आपले दरपत्रके नमूद केलेल्या तारखेपूर्वी कार्यालयीन वेळेत पोहोच करावीत. दरपत्रकासंदर्भात सविस्तर माहिती खालीलप्रमाणे आहे. वरील कामाचे दरपत्रक, सुचना सोलापूर विद्यापीठाच्या <http://su.digitaluniversity.ac.in> या संकेतस्थळावर Tender (Quotation) या शिर्षकाखाली उपलब्ध आहे.

क्र.	तपशील	दिनांक	वेळ	ठिकाण
१.	दरपत्रके प्रकाशित करण्याचा दिनांक व वेळ	०९/०८/२०१९		वित्त व लेखा विभाग, पुण्यश्लोक अहिल्यादेवी होळकर सोलापूर विद्यापीठ, सोलापूर-पूणे महामार्ग, केगाव, सोलापूर - ४१३ २५५
२.	दरपत्रके स्विकारण्याची दिनांक व वेळ	०९/०८/२०१९	दु. ०२.००	
३.	दरपत्रक सादर करणे अंतिम दिनांक व वेळ	१९/०८/२०१९	सांय. ०६.००	
४.	दरपत्रक उघडण्याचा दिनांक/वेळ आणि ठिकाण (शक्य झाल्यास)	२०/०८/२०१९	सकाळी ११.००	

कळावे,

(P.T.O.)


(सा.ए. श्रेणिक शहा)
वित्त व लेखा अधिकारी

सोबत : वरीलप्रमाणे सोबत (Schedule B) जोडलेले आहे.

सूचना व अटी

- १ दरपत्रक हे सीलबंद पाकीटातून कार्यालयीन वेळेत मा.कुलसचिव, पुण्यश्लोक अहिल्यादेवी होळकर सोलापूर विद्यापीठ, सोलापूर सोलापूर-पुणे महामार्ग केगांव, सोलापूर-४१३ २५५, यांच्या नावाने पोहोचतील अशा बेटाने पाठवावीत.
- २ पाकीटावरती दरपत्रके **ऑटोयुरीझम करिता लोखंडी टॉवर** करणेबाबत असा स्पष्ट उल्लेख करावा.
- ३ शॉप ॲक्ट, पॅन कार्ड, GST Registration, याची छायांकीत प्रत जोडणे आवश्यक आहे.
- ४ दिलेल्या मुदतीनंतर म्हणजेच उशिरा आलेला दरपत्रकांचा विचार केला जाणार नाही. तसेच अटी व शर्ती असलेली दरपत्रके मंजूर करण्यात येणार नाहीत.
- ५ दरपत्रके हे देताना आपले दर सर्व करारासाहित (Including GST किंवा Excluding GST) किंमत असा स्पष्ट उल्लेख करावा सदर पुरवठा (आवश्यकतेनुसार त्या त्या वेळी विद्यापीठात येवून विद्यापीठात पोहोच करणे/ आणून देणे. पुरवठा हा विद्यापीठ कार्यालयात स्व:खर्चाने करावा लागेल.
- ६ कोणतेही कारण न देता दरपत्रके स्वीकारणे अथवा नाकारणे याबाबत विद्यापीठाने अधिकार राखून ठेवलेले आहेत तसेच पुरवठा आदेशानुसार साहित्य नसेल तर पुरवठादाराचा ठेका रद्द करण्याचा अधिकार विद्यापीठास राहिल.
- ७ वरील दरपत्रकासंदर्भात काही शंका / अडचण असल्यास विद्यापीठाच्या ०२१७-२७४४७७०-७४ (Ext.२७८) या दूरध्वनी क्रमांकावर संपर्क साधावा.
वरील सूचना व अटी मान्य आहेत.

पुरवठादाराची स्वाक्षरी व शिक्का

To,
The Registrar,
Solapur University, solapur

Name of Firm :-

Address :-

Mobile No. :-

SOLAPUR UNIVERSITY, SOLAPUR


DETAILED ESTIMATE OF CIVIL WORK

No	Quantity	Item Description	Rate	Unit	Amount
1	2.92	Excavation for foundation in earth, soil of all types sand grave land soft murum including removing the excavated material upto a distance of 50 m beyond the building area and stacking and spreading as directed dewatering preparing the bed for the foundation and necessary back filling ramming watering including shoring and strutting etc complete (Lift up to 1.5m)	131.5/-	Mtr	383.25/-
2	2.92	Providing and laying cast in situ/Ready mix cement concrete in M20 of trap/granite/quartzite/gneiss metal for bed blocks. Foundation blocks and such other items including bailing out water plywood/steel formwork laying pumping compacting roughening them if special finish is to be provide finishing uneven and honey combed surface and curing etc. complete the cement mortar 1:3 plaster is considered for rendering uneven and honeycombed surface only Newly laid concrete shall be covered by gunny beg, plaster tarpaulin etc. (Wooden centering will not be allowed.) with fully automatic microprocessor based PLC with SCADA enable reversible Drum Type mixer/ coneret Batch mix plant (Pan mixer) etc. complete with natural sand/V.S.I. Quality Artificial sand.	4641/-	Mtr	13,551.72/-
3	0.65	Providing and fabrication structural Steel work in rolled sections like joists channels, angles, tees etc. as per detailed designand drawing or as directed including cutting fabricating, hoisting erecting fixing in position making riveted/bolted/welded connections without connecting plasters, braces etcand including one coat of anticorrosive paint and over it two coats of oil painting of approved quality and shade etc. complete.	53310.6	MT	34,651.89/-
4	2.23	Providing and fixing of colour coated zinc alluminium (R) AZ 150 (min 150 gms/sq.mt total on each side) profiled sheets for roofing. The feed material is manufactured out of nominal 0.45mm Base Metal Thickness (BMT) (0.5 mm TCT) . Ili Strength steel with min 550 Mpa yield strength	850.5	Sq.m	1,896.61/-

		metallic hot dip coated with aluminium Zinc alloy (55% aluminium 43.4% zinc 1.6% silicon) with COLORBOND (R) Steel quality super durable polyester pain coal (with inorganic pigment). The paint shall have a total coating thickness of nominal 35 um. Comprising of nominal 25 um exterior coat on top surface and nominal 10 um reverse coat on top surface Profile sheet shall have nom 950-1050mm effective cover width and nominal 25-30 mm deep rids with subtle square fluting in the five pan at nominal 180-250 mm center-to-center. The end rib shall be designed for ant capacity groove and return leg. The feed material should have coil manufactures Product details marked and regular interval including fasteners with min fastened with min 25 um Zinc - Tin alloy Coated. Hex head self-drilling screw etc. Complete (Weight of Profile 4.52 kg/sq.m) 601 mm to 900 mm girth (Surface width)			
				TOTAL	50,483.47/-
				Add GST 12%	6,058.01/-
				Total Amount	56,541.48/-

I/ we ready to work as per ----- % above/below/Estimated rate's in Schedule B

Signature of Contractor

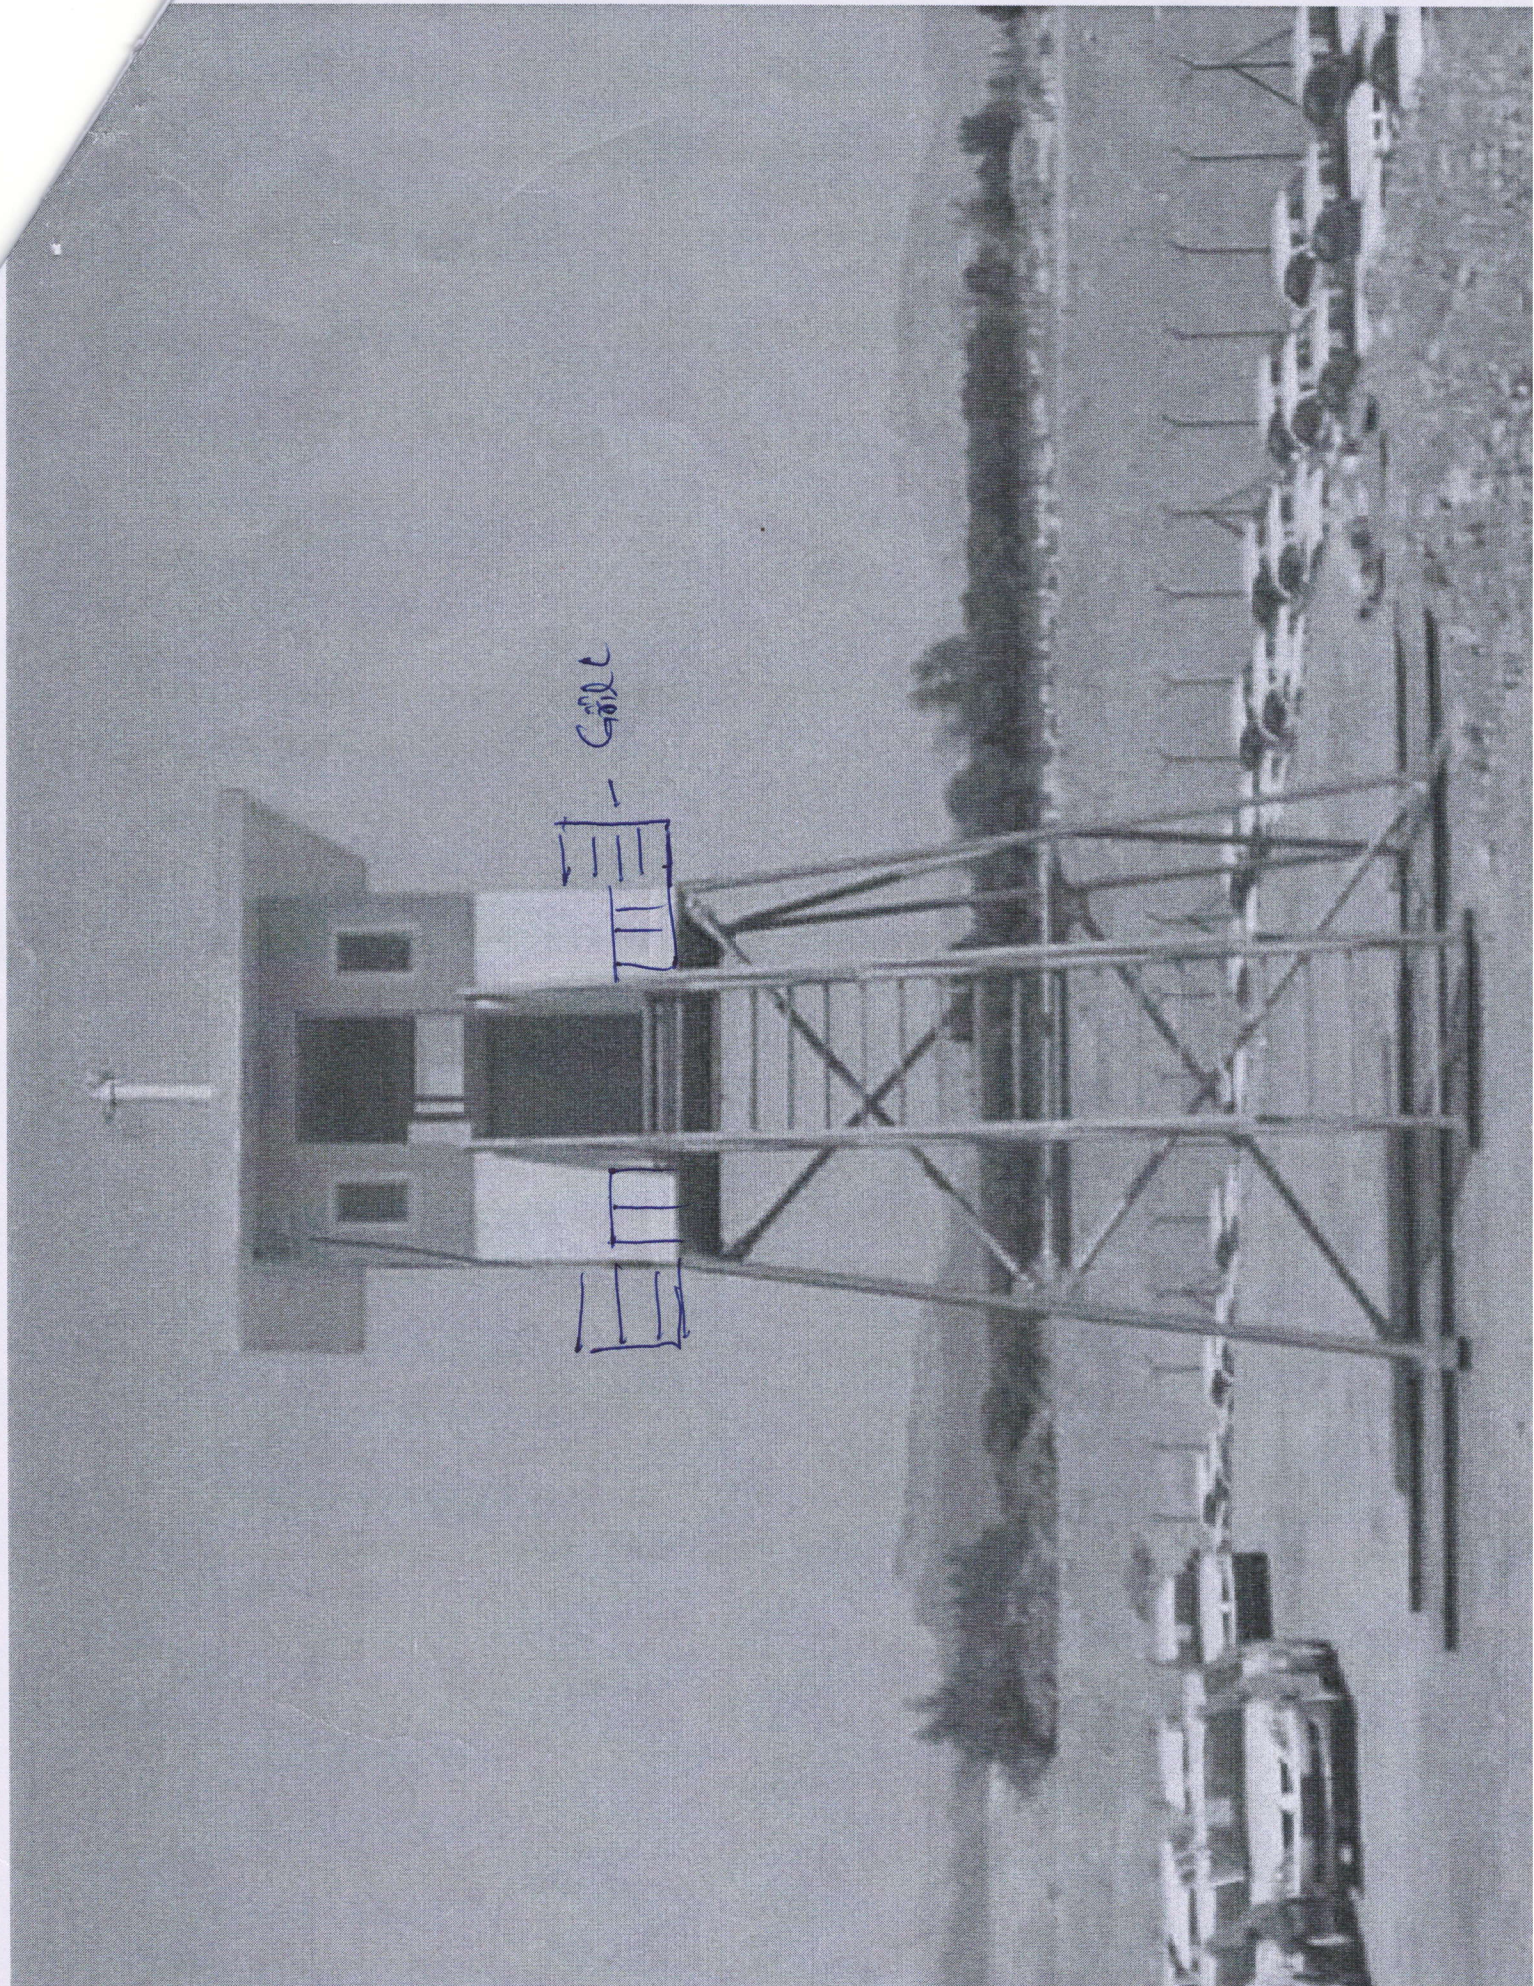

Göle

